



TYPICAL SECTION

MAP NO. 1
WBS 3CR.20711.112

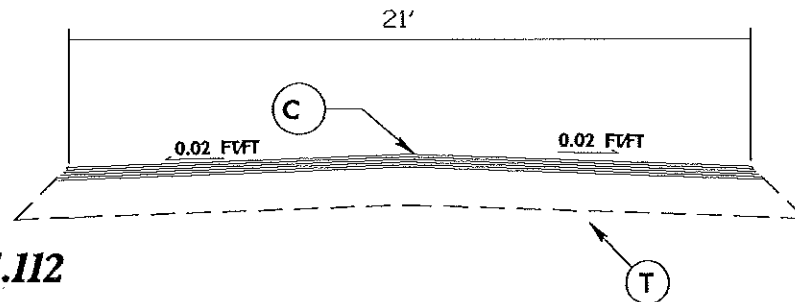

TYPICAL SECTION NO. 1

USE ON SR 1561

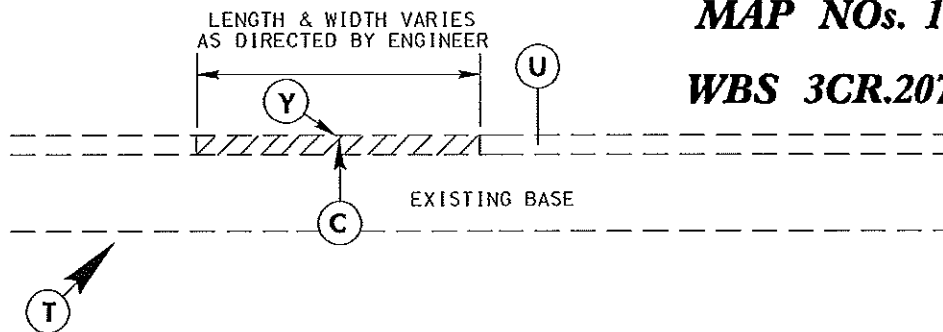


MAP NOs. 1 and 2
WBS 3CR.20711.112

TYPICAL SECTION NO. 2

MILL PATCHING

USE ON SR 1561

MAP NO. 2
WBS 3CR.20711.112

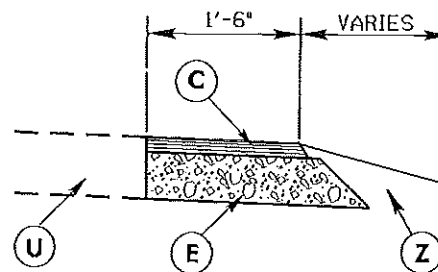

TYPICAL SECTION NO. 3

WIDEN FOR PAVED SHOULDERS
USE ON SR 1561.

PAVEMENT SCHEDULE

WBS ELEMENTS: 3CR.20711.112

C	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
E	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
T	EXISTING SUBGRADE MATERIAL.
U	EXISTING PAVEMENT.
Y	MILL EXISTING PAVEMENT 1-1/2".
Z	SHOULDER RECONSTRUCTION.